


NC4FBH-0

4 pole female XLR receptacle, grounding: separate ground contact to mating connector shell and front panel, horizontal PCB mount, retention spring instead of latch.

Same as A series with exception of a metal mounting flange featuring continuous circumferential ground contact to chassis for best EMC practice.



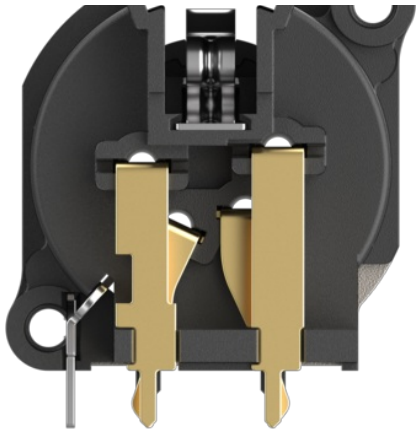

Features & Benefits

- Smallest XLR receptacles, highest packing density
- Metal mounting flange featuring continuous circumferential ground contact to chassis for best EMC and RF protection
- Steel retention spring instead of latch
- Fork type female contact
- Housing flammability UL 94 V-0

Technical Information

Produkte	
Title	NC4FBH-0
Connection Type	XLR
Gender	female

Elektrisch	
Capacitance between contacts	$\leq 7 \text{ pF}$
Contact resistance	$\leq 6 \text{ m}\Omega$
Dielectric strength	1,5 kVdc
Insulation resistance	$> 10 \text{ G}\Omega$ (initial)
Rated current per contact	6A
Rated voltage	$< 50 \text{ V}$
Grounding Options	Separate ground contact connected to mating connector shell and front panel, no connection to Pin 1

Mechanische Daten

Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Lifetime	> 1000 mating cycles
Wiresize	
Wiring	Horizontal PCB mount
Locking device	Retention spring
Mounting direction	Rear mounting
Chassis shape	B
Mounting	A-Screw

Material

Contacts	Bronze (CuSn6)
Insert	Polyamide (PA66)
Locking element	Steel Ck67
Ring	Zinc diecast (ZnAl4Cu1)
Flange	Metal

Umwelt

Flammability	UL 94 V-0
Standard compliance	IEC 61076-2-103
Protection class	IP 40
Solderability	Complies with IEC 68-2-20
Temperature range	-30 °C to +80 °C